

SSR15/SSR20/SSR25 SSR40/SSR40H Solid State Relay



SSR15 / SSR20 SSR25 / SSR40 / SSR40H


- Economical
- Low disturbance
- Low on-state resistance
- Low output leakage current
- Low current consumption
- Low conducted

Main Features

With LED Indicator

Zero Cross Turn On

Applications

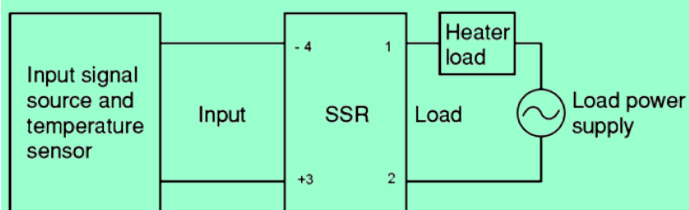

宇電(香港)自動化科技有限公司

YUDIAN (HK) AUTOMATION TECHNOLOGY CO. LIMITED

12/F, Chun Hoi Comm. Bldg., No.688 Shanghai St., Kln., H.K.

Tel: 27708785 Fax: 27708796

E-Mail : sales@yudian.com.hk

Web Site: www.yudian.com

SSR15/SSR20/SSR25 SSR40/SSR40H Solid State Relay



Specification

MODEL	SSR15	SSR20	SSR25	SSR40	SSR40H
Output					
Load Current	15A	20A	25A	40A	
Load Voltage	24~240VAC	24~240VAC	24~240VAC	24~240VAC	24~415VAC
Dimensions	(58L X 42W X 26H)mm, LED Status Indicator				
Input					
Input Voltage	4V~32V				
Input Current	≤8mA				
Release Voltage	≥1.2V				
Max. on-state Voltage Drop	≤1.2V				
Max. Leakage Current	≤2mA				
Max. Turn-On time (@50Hz)	<10mS				
Max. Turn-Off time (@50Hz)	<10mS				
Min. Off-State dv/dt	500V/μs				
I/O Insulation Resistance	≥100MΩ				
I/O Dielectric Strength	≥2500V				
Ambient Temperature	-20℃~80℃				

宇電(香港)自動化科技有限公司

YUDIAN (HK) AUTOMATION TECHNOLOGY CO. LIMITED

12/F, Chun Hoi Comm. Bldg., No.688 Shanghai St., Kln., H.K.

Tel: 27708785 Fax: 27708796

E-Mail : sales@yudian.com.hk

Web Site: www.yudian.com